

# OCULUS Ophthalmic Tables

Universal lifting tables  
for medical instruments



# OCULUS Ophthalmic Tables

High-quality, ergonomic and robust

OCULUS Ophthalmic Tables catch the eye with their distinctive design. Their multiplex tabletops with state-of-the-art high pressure laminate (HPL) give them a classy, aesthetic appearance. The HPL coating is highly resistant to chemical and thermal influences. The smooth surface is characterized by extreme strength and durability – making it just perfect for use in the medical field.

The standard colour of the table top is an unobtrusive matt white. The edges are stained dark brown. All OCULUS ophthalmic tables are medical products.



**10007495**

*Ophthalmic table for one device,  
symmetrical*




**10007496**

*Ophthalmic table for one device,  
asymmetrical*



**10007500**

*Ophthalmic table for one device,  
asymmetrical, wheelchair-accessible*

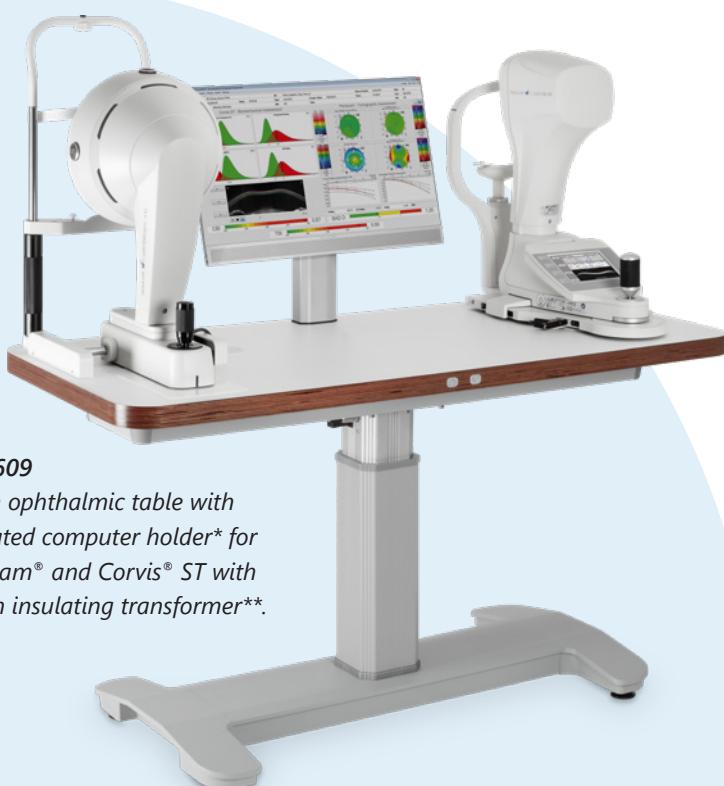

**10007609**

*System ophthalmic table with  
integrated computer holder\* for  
Pentacam® and Corvis® ST with  
built-in insulating transformer\*\*.*



**10007584**

*Ophthalmic table for two devices,  
symmetrical, delta-shaped tabletop*



**10007510**

*Ophthalmic table for two  
devices, symmetrical*

**10007507**

*Identical to 37460, but with  
different tabletop sizes*


\* Further special-purpose tables are available for various OCULUS devices. Please contact your local distributor for details.

\*\* All OCULUS ophthalmic tables are equipped with an insulating transformer which significantly contributes to the safety and functional capability of these medical products.


## Designed to fit anywhere in the room

All four feet are height-adjustable, providing a safe and steady base also on uneven floors. The table base is optionally also available on caster wheels.

All ophthalmic tables are equipped with a smooth-sliding vertically adjustable column.



Height-adjustable



Caster wheels with fixing brakes



## Illuminated height adjustment keys


The height adjustment keys are smoothly incorporated into the table edge. They are illuminated and are thus easy to find and operate also in darkened rooms.



## Cables neatly stowed away

Running from two connectors in the table base up to the tabletop are two network cables for your network devices. Neatly hidden away: The network cables run through the column.

The power connections for your devices are located under the tabletop. Two device connection cables are included.

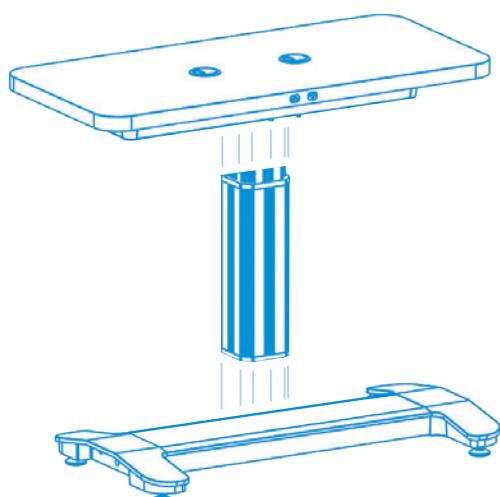


## Delivery and installation

Tables are delivered disassembled (3 parts) in two packages. This reduces shipping costs and minimizes the risk of transport damage.

# OCULUS Ophthalmic Tables

## Technical Data

Art. no.	Tabletop	Lift	Weight	Max. load capacity	Electr. connection
 10007495	630 x 500 mm (24.8 x 19.7 in)	655 – 905 mm (26.4 – 34.3 in)	29 kg (63.9 lbs)	84 kg (185.2 lbs)	115 – 240 V
 10007496	770 x 500 mm (30.3 x 19.7 in)	655 – 905 mm (26.4 – 34.3 in)	33 kg (72.8 lbs)	84 kg (185.2 lbs)	115 – 240 V
 10007500	980 x 500 mm (38.6 x 19.7 in)	655 – 905 mm (26.4 – 34.3 in)	39 kg (86.0 lbs)	84 kg (185.2 lbs)	115 – 240 V
 10007584	1050 x 570 mm (41.3 x 22.4 in)	655 – 905 mm (26.4 – 34.3 in)	36 kg (79.4 lbs)	84 kg (185.2 lbs)	115 – 240 V
 10007510	1050 x 500 mm (41.3 x 19.7 in)	655 – 905 mm (26.4 – 34.3 in)	42 kg (92.6 lbs)	84 kg (185.2 lbs)	115 – 240 V
 10007507	770 x 500 mm (30.3 x 19.7 in)	655 – 905 mm (26.4 – 34.3 in)	33 kg (72.8 lbs)	84 kg (185.2 lbs)	115 – 240 V
 10007513	1250 x 500 mm (49.2 x 19.7 in)	655 – 905 mm (26.4 – 34.3 in)	47 kg (103.6 lbs)	84 kg (185.2 lbs)	115 – 240 V



WWW.OCULUS.DE



The OCULUS QM system is certified in accordance with ISO 13485 (MDSAP) and (EU) 2017/745 (MDR)

OCULUS Optikgeräte GmbH  
Postfach • 35549 Wetzlar • GERMANY  
Tel. +49 641 2005-0 • Fax +49 641 2005-295  
Email: [export@oculus.de](mailto:export@oculus.de) • [www.oculus.de](http://www.oculus.de)

Find your local OCULUS representative on our website.